


PROJECT PROFILE

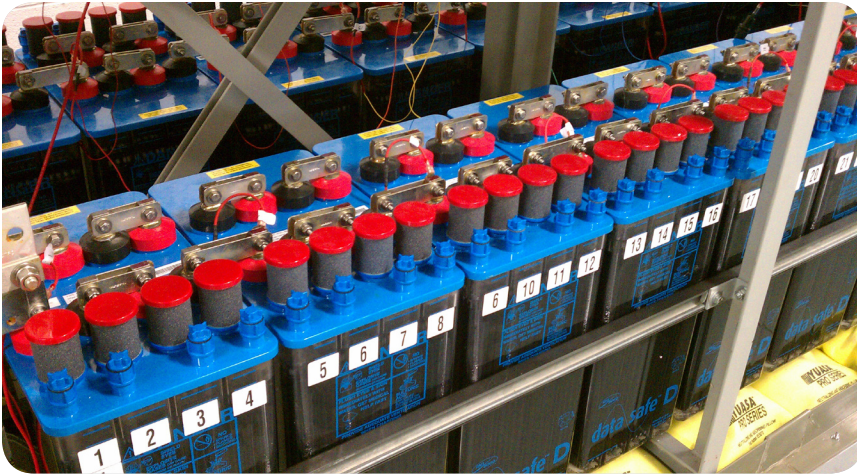

PROJECT TYPE

UPS / Datacenter

PROJECT LOCATION

Kansas City, MO

PRODUCTS & SERVICES

Battery Preventative Maintenance
Battery Installation



Before



After



Contract Holder
Contract GS-07F-0668N

Project Details

Two strings (2x176x2) of C&D XT4LC11s were replaced with Enersys DataSafe 4DXC-9B-FR on the existing C&D racks.

These new cells needed to provide 400kW for 10 minutes. The client also required that the new batteries have wrapped plates to prolong the battery life. Flame retardant jars and a 1.250 specific gravity were also specified.

An Alber BDS-256 battery monitoring system was also removed, re-installed and re-calibrated after the new cells were installed.

The customer considered a VRLA, but after seeing the annual cost of it over a 3-4 year lifespan, it did not make financial sense.



COMPLETE BATTERY SOLUTIONS

www.apibattery.com